



SIZES	
IG thickness	1"
Height range	42" to 80"
Width range	14" to 36"
Size increments	1/16" (height & width)
MATERIALS	
Spacer	Intercept®, tin plated steel
Glass (std.)	1/8" tempered safety glass
Glass (Low-E)	1/8" tempered safety glass 2nd surface soft coat Low-E 4th surface hard coat Low-E (optional)
Blind slat	12.5mm wide aluminum UV stabilized coating
Sealant	Dual seal equivalent
Desiccant	Desiccant matrix (moisture and chemical management)
Decorative cover caps	UV stabilized, heat tolerant, polymer
CODE COMPLIANCE	
IGCC (seal)	ASTM E2190 seal certification
ANSI (glass)	ANSI Z97.1 safety glazing
ASTM (glass)	ASTM C1036 & C1048 temper
ENERGY STAR®	Can use in doors to meet ENERGY STAR® criteria
NFRC	Reference Certified Product Directory for sliding door examples (CAD available for simulations)
OPERATION	
Dual operator	Raise/lower and tilt
Capillary tube	Do not block, crush or cut
COLORS	
Blind slat	White (Duracon UC76584)
Decorative cover caps	White (Duracon UC76584)
Sealant	Gray
Operator	White
Operator Track	White
MAINTENANCE	
Clean glass with quality window cleaner, as needed	
PROGRAM	
Standard	Low-E: 640 annually CL/CL: 320 annually
Details	Unique Part Numbers Forecast and supply agreement required Eight-week lead time on first order Ten working days after initial setup
WARRANTY	
10 year full warranty	

## TECHNICAL DRAWING

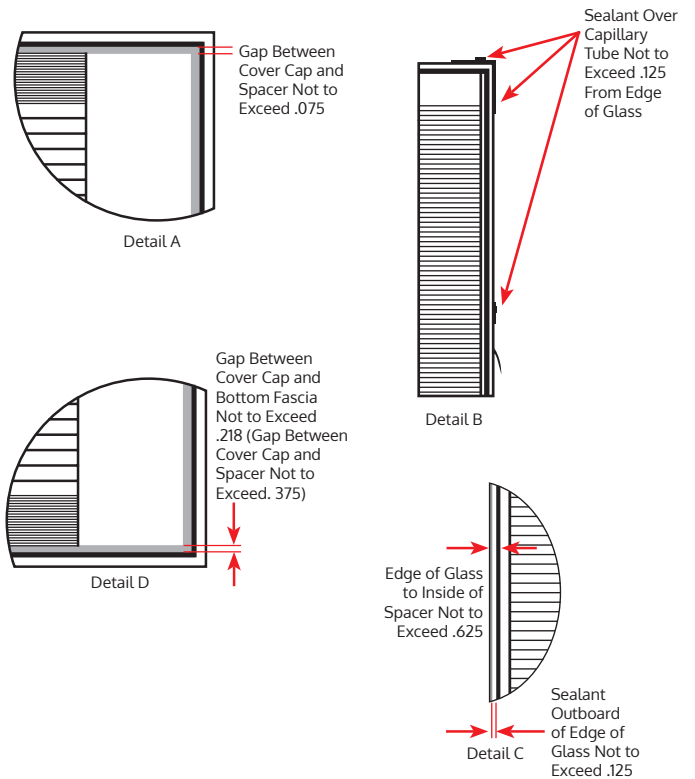

261 Commerce Way | Gallatin, TN 37066 USA  
1.866.472.0042 Toll-Free | 615-451-9700 Phone | 615-230-4301 Fax | www.BlinkODL.com

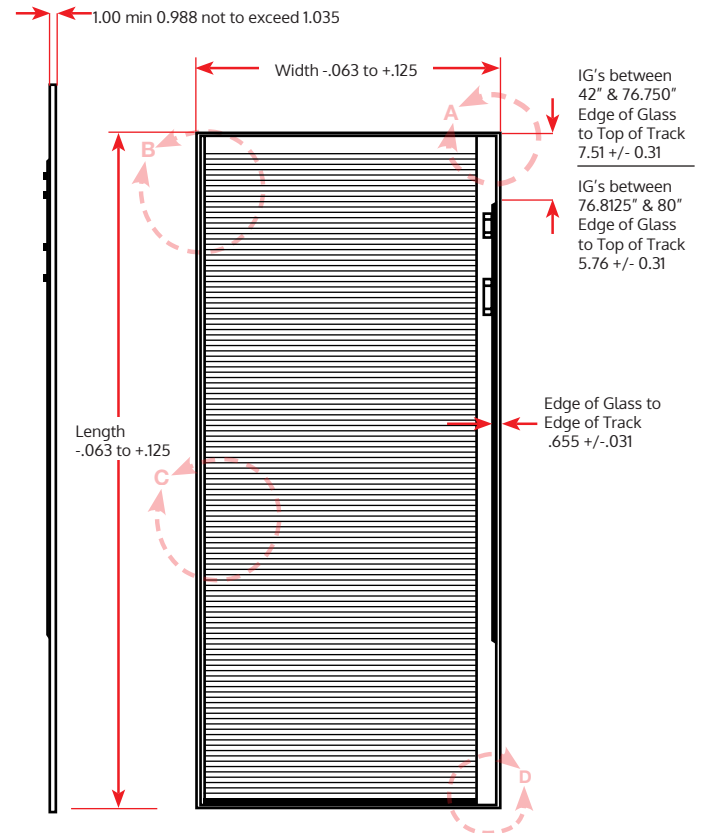

Parents for Window Blind Safety created the Seal of Approval program over a decade ago, to inform consumers of products which have greatly reduced or completely eliminated the risk of injury to children or pets.

