

THE BEST-SELLING BLINDS BETWEEN GLASS

Now Available for Entry Doors

Light and Privacy Control

The perfect levels of light and privacy are yours to control. Our superior **EasyGlide System** allows our blinds to tilt completely closed, keeping you safe from prying eyes and unwanted light.

Easy to Operate

The ergonomically placed operator lets you raise, lower and tilt your blinds the entire length of the doorglass with only the slightest movement. No reaching or stooping is needed to adjust the blinds.

Low Maintenance

Since our blinds are enclosed between two panels of glass, you never need to dust which decreases allergens in your home. Blink Entry Doorglass carries a 20-year warranty on blinds, glass seal and operator for a long-term performance in your exterior door.

Safety

With no dangling cords, Blink Entry Doorglass is certified safe for children and pets. All of our enclosed blinds are offered in tempered safety glass.



Attention to Detail

We prioritized style and design by offering white and on-trend slate gray, and paid attention to aesthetic details, such as covering the cords with a bottom rail and matching all the visible components. We offer a white impact frame with clear or Low-E glass.





Sizes

IG Thickness	1.22"
Doorglass	20 x 36, 22 x 36, 20 x 64, 22 x 64, 20 x 80, 22 x 80
Sidelights	8 x 64, 14 x 64, 8 x 80, 14 x 80
Doors	1.66" to 1.80" thick



TECHNICAL DRAWINGS & SPECIFICATIONS

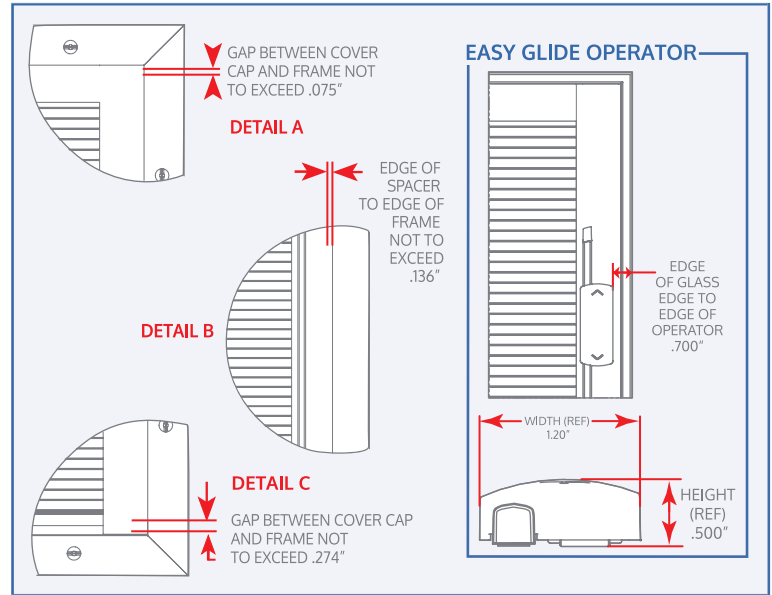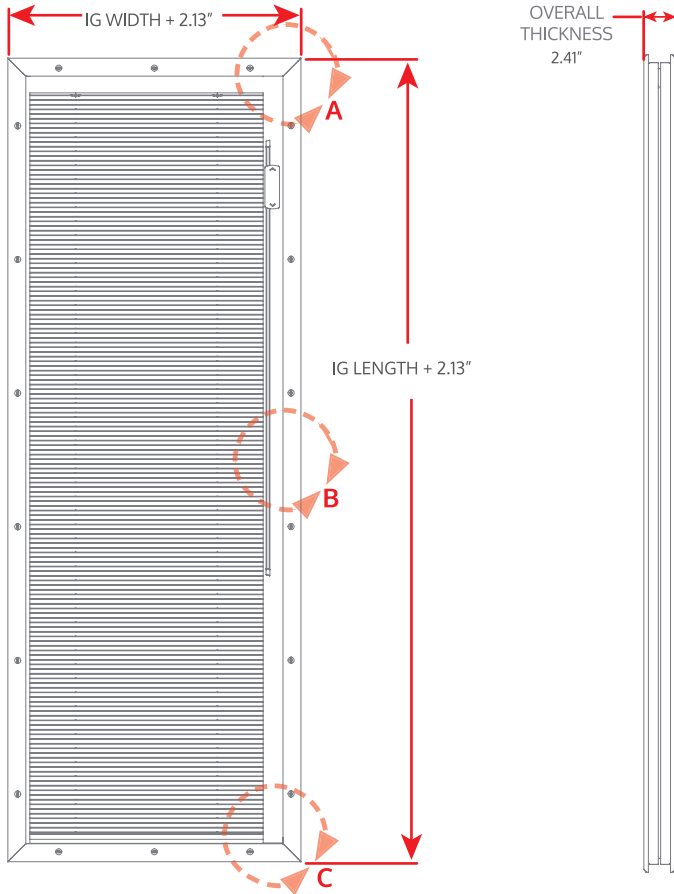

Materials	
Spacer	Intercept®, tin plated steel
Glass (Clear)	1/8" tempered safety glass
Laminated Glass (Clear)	(2) 1/8" clear glass, .090 PVB inner layer
Laminated Glass (Gray Tinted)	1/8" clear glass, .090 PVB inner layer, 1/8" turtle compliant glass
Laminated Glass (Low-E)	1/8" clear glass, .090 PVB inner layer, 1/8" hardcoat Low-e glass
Frame	Aluminum, powder coated
Blind Slat	12.5 mm wide aluminum UV stabilized coating
Sealant	Dual seal equivalent
Desiccant	Desiccant matrix (moisture & chemical management)
Decorative Cover Caps	UV stabilized, heat tolerant polymer

Warranty	
20-year limited warranty.	

Code of Compliance	
IGCC (seal)	ASTM E2190 seal certification
ASTM (laminated glass)	ASTM C1172
ANSI (interior glass)	ANSI Z97.1 safety glazing
ASTM (interior glass)	ASTM C1036-16 flatness & C1048-18 tempered
ANSI (safety)	ANSI/WCMA A100.1-14
Turtle Code Compliant	Meets sea turtle regulations (gray glass only)
ASTM (impact frame)	ASTM D3359-02 adhesion Florida Building Commission FL14935.1-4
HVHZ (doorglass)	HVHZ DP +/- 66
STC (doorglass)	STC 39
ENERGY STAR®	Can use in doors to meet ENERGY STAR® criteria

Operation	
Blind Function	Raise, Lower, and Tilt
Easy Glide Single Operator	Single Shot
Capillary Tube	Do not block, crush or cut
Operator Hand	Right-hand only

Maintenance	
Glass	Clean with soap and water or quality window cleaner
Frame	Clean with soap and water